

# De-identify Dataset

A data extract can be de-identified using the De-identify tool menu option within CAT. You must load the data set you wish to de-identify before running the tool.

Click Tools > De-identify Dataset

You will receive a confirmation message once the process had completed

Click OK

The new de-identified dataset will appear in your list of extracts

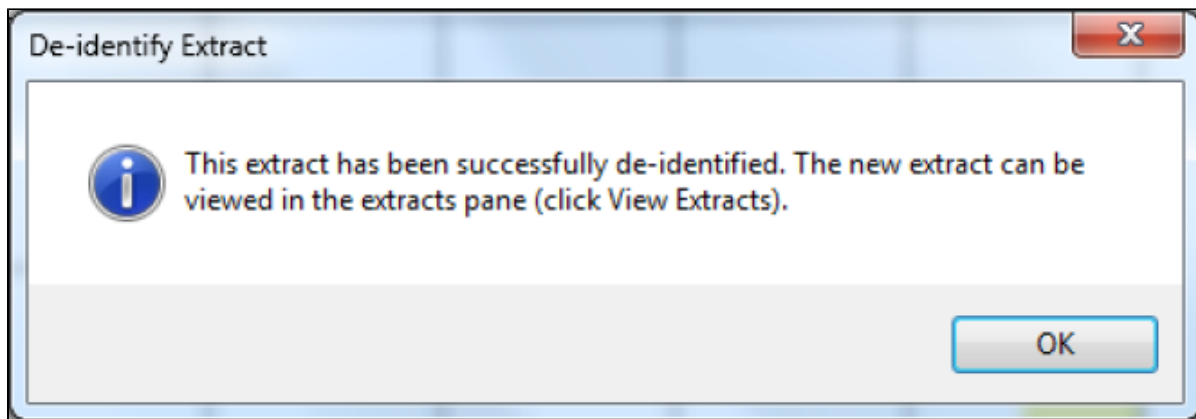


Figure 85: Completed de-identify message

16/02/2010 9:08 AM	11775	DEIDENTIFIED_pe...
16/02/2010 9:08 AM	11775	PENMLB_01

Figure 86: Original and de-identified datasets in extracts list